



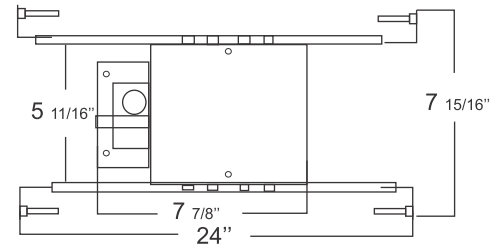

Project:

Fixture Type:

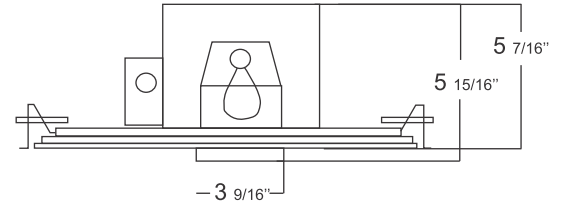

## Housing

- 1) Die-formed aluminum for maximum heat dissipation and rust protection
- 2) Designed for New Construction installation
- 3) Housing can be installed in 1/2" to 1-3/8" thick ceilings.

## Hanger Bar

- 1) Allow housing to be positioned and locked at any point within a 24" joist span.
- 2) Can be shortened for 12" joists
- 3) Can be positioned on long or short axis of the housing
- 4) Contain integral nail
- 5) Hanger fit onto T-bar spline for quick alignment

## Junction Box

- 1) ETL listed for through branch wiring
- 2) 2 in-2 out or 4 in-4 out J-box for your better choices
- 3) Designed for straight through conduit runs
- 4) 1/2" and 3/4" romex wiring knockouts
5. Pre-wired junction box provided with removable access plate
6. Knockouts equipped with pry out slots
- 7.

All leads are #18AWG wire, ground wire is connected, supplied on all leads to the bottom, quick connectors are supplied on all leads

## Lamp

LED GU10 Lamp 8W max. MR16 GU5.3 8W Max. PAR16 E26 8W Max.

CRI>80%

PF>0.9

Color Temperature:2800K-6500K

## Listing

ETL listed for damp location W/Feed through

## AIR-TIGHT

Gasket to prevent air flow from heated or air conditioned spaces.

Meets all national air flow requirements.

